

# USM-F type seal - internal diaphragm flanged type

## Design description

The USM-F construction is designed for those applications where the existing process connection is too small to use a flush diaphragm seal. The USM-F consists of an upper and lower housing, the upper is the actual seal part with a diaphragm size that allows for measurement of low ranges. The lower housing creates the transition from the diaphragm size to the smaller process connection.



## Housing / diaphragm combinations

Body Material	Diaphragm material		
(Lower part)	General name	UNS	Wst.
AISI 316(L)	AISI 316L	S31603	1.4404
	AISI 304L	S30400	1.4306
	AISI 321	S32100	1.4541
	AISI 316 UG	S31603	1.4435
	Alloy C276	N27600	2.4810
AISI 304L	AISI 304L	S30400	1.4306
AISI 310 MoLn	25-22-2 LMN	S31050	1.4466
AISI 316 UG	AISI 316 UG	S31600	1.4435
AISI 321	AISI 321	S32100	1.4541
AISI 904(L)	AISI 904L	N08904	1.4539
Alloy 20	Alloy 20	N08020	2.4660
Alloy 400	Alloy 400	N04400	2.4360
Alloy 600	Alloy 600	N06600	2.4816
Alloy 625	Alloy 625	N06625	2.4856
Alloy 825	Alloy 825	N08825	2.4858
Alloy B2	Alloy B2	N10665	2.4617
Alloy C-22	Alloy C-22	N06022	2.4602
Alloy C-276	Alloy C-276	N10276	2.4810
Duplex F44	254 SMO (6Mo)	S31254	1.4547
Duplex F51/F60	Duplex 2205	S32205	1.4462
Duplex F53	Super Duplex 2507	S32750	1.4410
Duplex F55	Super Duplex 2507	S32750	1.4410
Nickel 201	Nickel 201	N02201	2.4068
Titanium Gr. 2	Titanium Gr. 1	R50250	2.7025
AISI 316(L) PTFE lined	Tantalum	R60702	-

All upper part materials are standard AISI 316(L) except for Titanium versions where the upper part is Titanium as well.

## Flange size, rating and facings - ASME B16.5

ASME B16.5			
Size	Rating	Facing	Roughness
1/2" to 2"	cl. 150 - cl. 1500	RF, LMF, FF, SGF	Ra 3.2-6.3 µm
		RJF	Ra <1.6 µm
		SMF, LTF, STF, LGF, LFF, SFF	Ra <3.2 µm

## Flange size, rating and facings - EN 1092-1

EN 1092-1			
Size	Rating	Type	Roughness
DN15 to DN50	PN10-160	A, B1, E, F	Ra 3.2-12.5 µm
		B2, C, D, G, H	Ra <0.8-3.2 µm

## Flange size, rating and facings – JIS B2220

JIS B2220			
Size	Rating	Type	Roughness
DN25 to DN50	10-20K	RF	Ra 3.2-12.5 µm

## Gold coatings

Two types of gold coating thickness can be applied on the USM-F seals, both suitable for corrosion protection and hydrogen permeation. The selection possibilities are:

- 25 µm thickness
- 40 µm thickness

-> See datasheet "Gold coatings"

## Polymer solutions

Polymer solutions come in several executions and forms. The technical data on thickness and temperature limitation can be found in datasheet "polymer solutions". The upper part of the USM-F can be executed with:

- PTFE coating
- ECTFE (Halar®) coating
- PFA coating
- FEP coating
- PTFE sheet

The lower part of the USM-F can be executed with:

- PTFE coating
- PFA coating
- PTFE lining

-> See datasheet "Polymer solutions"

## Capillary tube and armor (protection)

The standard capillary mounting position is top side (axial) of the seal. Alternatively, the capillary can be placed at the side of the seal (radial). The standard tube material is TP316 (316SS), optionally available in Alloy 400. There are three options in ID of the capillary; 2mm, 1mm, and 0.7mm. Badotherm capillaries are always protected against mechanical forces by armor. This doubled shielded armor consist is standard AISI 304, and optionally AISI 316. Additionally, the armor could be protected with a PVC sleeve in white, black, optionally with ATEX114 approval to protect against dust and water ingress and possibly corrosive ambient atmosphere.

-> See datasheet "Capillary lines"

## Cooling options

There are several ways to protect the instrument from elevated temperatures, such as the extended direct mount (EDM), a temperature reducer (TR) or by means of capillary.

-> See datasheet "cooling devices"

## Material Certification

Material traceability and related certification are applicable for all process wetted parts. Material certification possibilities depend on the type of seal, the assembly construction and the materials used.

Material certification is in accordance with EN10204 3.1.

Additional material certification and testing can be provided on request, such as Positive Material Identification (PMI), Intergranular corrosion (IGC) testing, material certification in accordance with EN10204 3.2, NACE conformity for ISO-15156 (MR-0175) and/or ISO-17945 (MR-0103), NORSOK M-630 and many more.

-> Please note that the responsibility for material selection always rests with the user.

## Flange Marking & Traceability

All flanges are marked by the forging shop with heat number, material designation, size, and rating. Badotherm adds a Badotherm reference number and the manufacturers name to the flange for traceability purposes.

## Flanges and origin

The seal parts are made from forged materials according to the applicable standards. The standard sourcing of flanges is of international origin. Optionally regional preference can be requested, for example materials from EU origin.

## Testing

All seals are helium tested according the EN 13185 test procedure A.3 up to 10<sup>-9</sup> mbar l/s before used on a diaphragm seal application.

-> See datasheet "Diaphragm Seal testing"

## Cleanliness of the wetted parts

All parts are standard cleaned from excessive oil and grease. When additional requirements are needed, the parts can be cleaned according customer requirements and cleaning specifications.

## Retaining bolts & nuts

The retaining bolts between upper and lower part can be selected in different materials and are in the size 3/8" UNC.

Grade bolt	Grade nut	Material
ASTM F593C	ASTM F594C	AISI 304
ASTM F593F	ASTM F594F	AISI 316
ASTM A193 B7	ASTM A194 2H	Carbon steel
ASTM A193 B8M	ASTM A194 8M	AISI 316

## Torque

The closing between upper part and lower part is done with 8 bolts. Depending on the bolt material the torque of the bolts is

Material	Torque
ASTM F594C	25 Nm
ASTM A192 B7	35 Nm

## Gaskets

For the USM-F a gasket is supplied for the closing between the upper and the lower part of the USM-F. The gaskets are virgin PTFE or camprofile stainless steel with graphite layer. The gasket area of the lower part is matching the process connection. The design has a matching ID of the lower part based on the S40 of the ASME 16.10.

Material	OT	MAOP @20°C
Virgin PTFE	-200 / +260°C	235 bar
Camprofile (316L with graphite layer)	-200 / + 500°C	345 bar

## Pressure

The maximum working pressure of the USM is limited. The maximum allowed operating pressure MAOP of the upper and lower construction is limited to 345 bar at 20°C. The maximum pressure of the assembly is depending on the selection and quantity of bolts and gasket and lower part pressure class.

Size	Grade	MAOP @ 20°C	MAOP @ 250°C	MAOP @ 400°C
8 x 3/8"	ASTM F593C/G	235 bar	181 bar	155 bar
8 x 3/8"	ASTM A193 B7/B8M	345 bar	261 bar	227 bar

Based on the assumption bolts and body materials has same expansion coefficients. Some materials are limited by material specification and are not able to meet 400°C.


## Flushing ports

The USM-F diaphragm seal is suitable to be equipped with one or two flushing ports. This ports can be left open, or fitted with needle valves, blind plugs or vent plugs. The type and size of the port can be selected within below size.

Size	Standard	Sealant
1/4" NPT-f	ANSI B1.20.1	Tape or paste
1/2" NPT-f	ANSI B1.20.1	Tape or paste
G 1/4"	ISO 228-1	gasket ISO 1179
G 1/2"	ISO 228-1	gasket ISO 1179
1/2" Socket weld	ASME 16.9	weld
1/2" Butt weld	ASME 16.11	weld

## Thickness with flush ports

USM lower parts are perfectly suitable for flush connections. However some sizes will need extra thickness of the lower part. Below a table with a "rule of thumb" to determine the new thickness of the lower part. The flush channel to the chamber is 6mm.

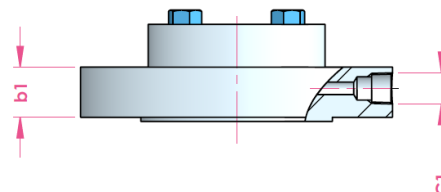


Flush size (C1)	b1
1/4" G/NPT	b<20 then b1=20
3/8" G/NPT	b<28 then b1=28
1/2" G/NPT	b<35 then b1=35
1/2" butt weld	b<24 then b1=24
3/4" butt weld	b<30 then b1=30
1/2" socket weld	b<33.5 then b1=33.5
3/4" socket weld	b<41 then b1=41

All dimensions in mm.

## PTFE lined lower part

The lower part of the USM-F can be made with PTFE lining. The lower parts are designed in a way the sizes can be kept the same. The minimum thickness of the lining is t=1mm, and at some points thicker in order to give maximum chemical resistance.



## Example performance calculation

Whether a diaphragm seal can be used for a specific measurement, depends on the size of the diaphragm. That size is restricted by the size of the diaphragm seal.

For pressure transmitters, Badotherm offers an online performance calculation tool to calculate its performance and to ensure that the diaphragm size is suitable for your measurement.

The table below presents the minimum span of the respective diaphragm sizes with standard process conditions. As rule of thumb, a TPE of max 5% is often considered acceptable, but it depends per situation.


**Minimum span table**

dD	AP/GP	DP
58mm	415 mbar	70 mbar

*Pressure transmitter; ambient temperature -10...+30°C; process temperature 100°C with BSO 22 fill fluid; 3 meter capillary; ID 1mm*

See the general overview of all diaphragm sizes with several standard situations and in combination with Badotherm pressure gauges.


## Dimensions table: ASME 16.5 RF facing

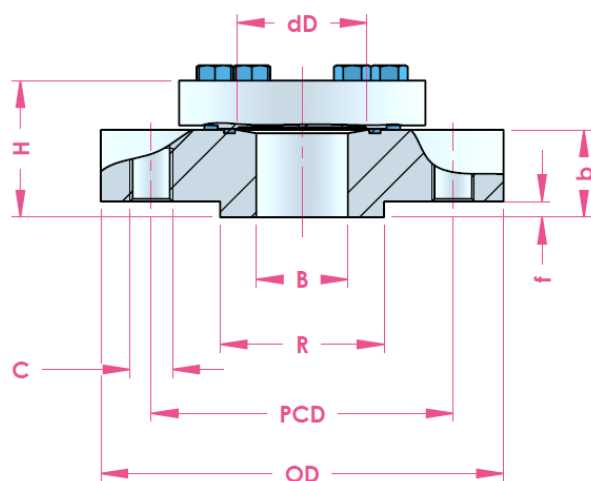

size	rating	OD	B	R	b	f	H	PCD	C / pcs	Weight
1/2"	cl. 150	110.0	15.8	34.9	33	2.0	56.0	60.3	1/2" - 13 UNC / 4x	3.5
	cl. 300				39	7.0	67.0	66.7		3.6
	cl. 400 - 600									3.7
	cl. 900 - 1500	120.0			35	63.0	82.6	3/4" - 10 UNC / 4x	3.9	
3/4"	cl. 150	110.0	21.0	42.9	30	2.0	53.0	69.9	1/2" - 13 UNC / 4x	2.8
	cl. 300	115.0			29	7.0	52.0	82.6	5/8" - 11 UNC / 4x	3.1
	cl. 400 - 600									33
	cl. 900 - 1500	130.0			37	61.0	88.9	3/4" - 10 UNC / 4x	4.1	
1"	cl. 150	110.0	26.6	50.8	24	2.0	47.0	79.4	1/2" - 13 UNC / 4x	2.7
	cl. 300	125.0			29	7.0	52.0	88.9	5/8" - 11 UNC / 4x	4.0
	cl. 400 - 600									37
	cl. 900 - 1500	150.0			23	46.0	88.9	1/2" - 13 UNC / 4x	5.7	
1.25"	cl. 150	115.0	35.1	63.5	29	2.0	52.0	98.4	5/8" - 11 UNC / 4x	2.8
	cl. 300	135.0			33	7.0	57.0	98.4	5/8" - 11 UNC / 4x	4.0
	cl. 400 - 600									27
	cl. 900 - 1500	160.0			29	52.0	114.3	3/4" - 10 UNC / 4x	7.8	
1.5"	cl. 150	125.0	40.9	73.0	27	2.0	50.0	98.4	1/2" - 13 UNC / 4x	3.4
	cl. 300	155.0			32	7.0	60.0	123.8	1" - 8 UNC / 4x	5.3
	cl. 400 - 600									29
	cl. 900 - 1500	180.0			32	60.0	123.8	1" - 8 UNC / 4x	6.9	
2"	cl. 150	150.0	47.0	92.1	26	2.0	49.0	120.7	5/8"-11 UNC / 4x	4.1
	cl. 300	165.0			40	7.0	54.0	127.0	5/8"-11 UNC / 8x	4.7
	cl. 400 - 600									26
	cl. 900 - 1500	215.0			40	68.0	165.1	25.4mm / 8x	11.0	

All dimensions in mm.


## Dimensions table: ASME 16.5 RJF facing

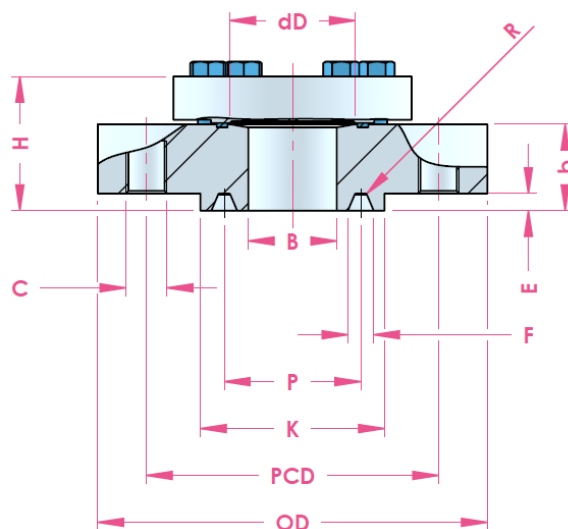

size	rating	OD	B	b	K	E	F	H	P	R	Ring#	PCD	C / pcs	Weight			
1/2"	cl. 300	110.0	15.8	33.0	51.0	5.54	7.14	59.5	34.14	0.8	11	66.7	1/2"-13 UNC / 4x	3.6			
	cl. 400 - 600			39.0	51.0		65.5				12		3/4"-10 UNC / 4x	3.9			
	cl. 900 - 1500	120.0		35.0	60.5		62.4	39.67				12		3/4"-10 UNC / 4x	3.9		
3/4"	cl. 300	115.0	21.0	29.0	63.5	6.35	8.7	56.4	42.88		13	82.6	5/8"-11 UNC / 4x	3.2			
	cl. 400 - 600			33.0	66.5			60.4	44.45		14	88.9	3/4"-10 UNC / 4x	4.1			
	cl. 900 - 1500	130.0															
1"	cl. 150	110.0	26.6	24.0	70.0			51.4	47.63		15	79.4	1/2"-13 UNC / 4x	2.8			
	cl. 300			29.0				56.4	50.80		16	88.9	5/8"-11 UNC / 4x	4.0			
	cl. 400 - 600	125.0															
1.25"	cl. 900 - 1500	150.0		37.0	71.5			64.4							101.6	7/8"-9 UNC / 4x	5.7
	cl. 150	115.0		23.0	73.0			50.4	57.15		17	88.9	1/2"-13 UNC / 4x	2.9			
	cl. 300	135.0	35.1	29.0	79.5			56.4	60.33		18	98.4	5/8"-11 UNC / 4x	4.1			
cl. 400 - 600		33.0		81.0	60.4												
cl. 900 - 1500	160.0																
1.5"	cl. 150	125.0	40.9	27.0	82.5			54.4	65.07		19	98.4	1/2"-13 UNC / 4x	3.7			
	cl. 300			39.0	90.5	66.4	68.27	20	114.3		3/4"-10 UNC / 4x	5.8					
	cl. 400 - 600	155.0		32.0	92.0	59.4											
2"	cl. 900 - 1500	180.0			102.0								123.8	1"-8 UNC / 4x	6.9		
	cl. 150	150.0	47.0	26.0	108.0	7.92	11.91	53.4	82.55	22	120.7	19.1mm / 4x	4.3				
	cl. 300																
	cl. 400 - 600	165.0															
cl. 900 - 1500	215.0		40.0	124.0	68.9			95.25	24	165.1	25.4mm / 4x	11.0					

All dimensions in mm.


## Dimensions table: EN 1092-1 B1 type

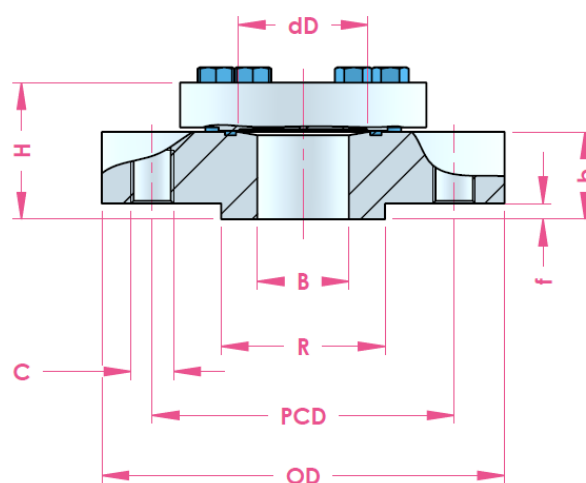

size	rating	OD	B	b	R	f	H	PCD	C / pcs
DN15	PN10-40	110.0	17.3	32.0	45.0	2.0	52.5	65.0	M12 / 4x
	PN63-100			29.0			49.5	75.0	
DN20	PN10-40	130.0	22.3	20.0	58.0		40.5	90.0	M16 / 4x
	PN63-100		21.7	24.0			44.5	85.0	M12 / 4x
DN25	PN10-40	115.0	28.5	29.0	68.0		49.5	85.0	M12 / 4x
	PN63-100			35.0			55.5	100.0	M16 / 4x
DN32	PN10-40	140.0	37.2	27.0	78.0		47.5		110.0
	PN63-100		155.0	36.6			30.0	50.5	
DN40	PN10-40	150.0	43.1	24.0	88.0	45.5	125.0	M16 / 4x	
	PN63-100	170.0	42.5	26.0		47.5		M20 / 4x	
DN50	PN10-16	165.0	47.0	30.0	102.0	3.0	51.5	125.0	M16 / 4x
	PN25-40						51.5		
	PN63	180.0					51.5	135.0	M20 / 4x
	PN100	195.0		28.0			49.5	145.0	M24 / 4x

All dimensions in mm.

## Dimensions table: JIS 2220 RF

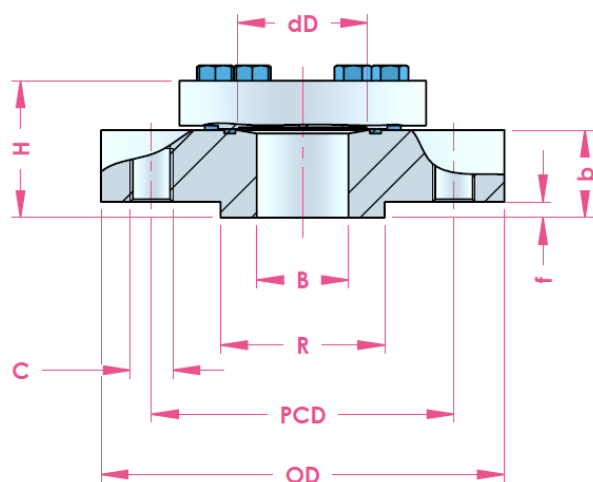

size	rating	OD	B	b	R	f	H	PCD	Cc / pcs
NS15	10K	110.0	22.2	32.0	51.0	1.0	52.5	70.0	M10 / 4x
	16K			29.0			49.5		M12 / 4x
	20K			20.0			40.5		
NS20	10K	110.0	27.7	24.0	56.0	1.0	44.5	75.0	M10 / 4x
	16K			29.0			49.5		M12 / 4x
	20K			35.0			55.5		
NS25	10K	125.0	34.5	27.0	67.0	1.0	47.5	90.0	M16 / 4x
	16K			30.0			50.5		
	20K			24.0			45.5		
NS32	10K	135.0	43.2	32.0	76.0	2.0	52.5	100.0	M12 / 4x
	16K			29.0			49.5		M16 / 4x
	20K			20.0			40.5		
NS40	10K	140.0	47.0	24.0	81.0	2.0	44.5	105.0	M12 / 4x
	16K			29.0			49.5		M16 / 4x
	20K			35.0			55.5		
NS50	10K	155.0	47.0	27.0	96.0	2.0	47.5	120.0	M12 / 4x
	16K			30.0			50.5		M16 / 8x
	20K			24.0			45.5		

All dimensions in mm



**Authorised Distributor:****NATIONWIDE  
OIL & GAS**

46, Jalan SS 22/21, Damansara Jaya,  
47400 Petaling Jaya,  
Selangor Darul Ehsan, Malaysia.

*Email: [nog@nog.com.my](mailto:nog@nog.com.my)*

*Website: [www.nog.com.my](http://www.nog.com.my)*

Holland – Romania – India – Thailand – Dubai – USA

To our knowledge, the information contained herein is accurate as of the date of this document. However neither Badotherm, nor its affiliates makes any warranty, express or limited, or accepts any liability in connection with this information or its use. This information is for technical skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other product. The user alone finally determines suitability of any information or material in contemplated use, the manner of use and whether any patents are infringed. This information gives typical properties only. Badotherm reserves the right to make changes to the specifications any materials without prior notice. The latest version of the datasheet can be found on [www.badotherm.com](http://www.badotherm.com).

© 2015 Badotherm, all rights reserved. Trademarks and/or other products referenced herein are either trademarks or registered trademarks of Badotherm.

DSS 7009  
30 March 2020