

- > Port size: 3/8" ... 1 1/2" (ISO G/NPT)
- > Robust corrosion resistant design
- > Protect pressure system components against contamination
- > Element serviceable without need to remove filter from line



### Technical features

A rugged all stainless steel filter. Comprises a stainless steel sintered mesh element which can be easily removed for maintenance.

**Medium:**

Liquids and gases

**Maximum inlet pressure:**

W11: 550 barg (7977 psig)  
W12: 420 barg (6091 psig)  
W13: 310 barg (4496 psig)

**Filtration:**

25 µm standard  
5 or 15 µm optional

**Port size:**

3/8", 3/4", 1" or 1 1/2"

**Ambient/Media temperature:**

NBR:  
-10 ... +100°C (+14 ... 212°F)  
FPM:  
-20 ... +150°C (-4 ... 302°F)  
EPDM:  
-30 ... +115°C (-22 ... 239°F)  
Nitrile (special grade)  
-50 ... +90°C (-58 ... 194°F)  
Aluminium  
-50 ... +150°C (-58 ... 302°F)  
Stainless Steel  
-50 ... +150°C (-58 ... 302°F)

**Materials:**

Body: stainless steel BS EN 10088 1.4401  
Filter: stainless steel sintered mesh  
Elastomers: NBR, FPM, EPDM

### Technical data, standard models

Symbol	Port size	Filter element (µm)	Nominal size (mm)	(inch)	Nominal flow area (mm <sup>2</sup> )	(inch <sup>2</sup> )	Flow coefficient (Kv)	(Cv)	Model
	3/8"	25	10	0.39	28	0.04	0,82	0.96	W11A9E2N25
	1"	25	16	0.63	200	0.31	5,82	6.85	W12A9E6N25
	1 1/2"	25	24	0.94	452	0.70	13,08	15.40	W13A9E8N25

### Option selector

W1★A9★★★★★

Design size	Substitute
3/8" (10 mm normal size)	1
3/4"... 1" (16 mm normal size)	2
1 1/2" (24 mm normal size)	3
Port size	Substitute
G3/8 (W11)	E2
3/8 NPT (W11)	A2
G3/4 (W12)	E5
3/4 NPT (W12)	A5
G1 (W12)	E6
1 NPT (W12)	A6
G1 1/2 (W13)	E8

Filtration	Substitute
5 µm	05
15 µm	15
25 µm	25
Elastomer	Substitute
NBR	N
FPM	V
EPDM	E
NBR (special grade)	Q

Option selector spare kits

Port size	Substitute
3/8"	1
3/4 or 1"	2
1 1/2"	3


W1★S★★★

Elastomer	Substitute
NBR	N
FPM	V
EPDM	E
NBR (special grade)	Q
Filter element	Substitute
5 µm	05
15 µm	15
25 µm	25

Spares BOM

Description	Material	QTY
'O'-Ring	Rubber	2
Filter	Steel mesh	1
'O'-Ring	Rubber	1

Dimensions

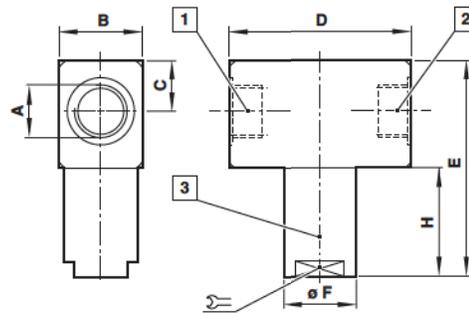

Dimensions in mm  
Projection/First angle



- 1 Inlet port
- 2 Outlet port
- 3 Mesh element can be easily removed for maintenance

A	B	C	D	E	Ø F	H		Weight (kg)	Model
3/8"	38	17	65	103	32	66	24	1	W11
3/4"	55	33	120	141	48	71	36	4	W12
1"	55	33	120	141	48	71	36	4	W12
1 1/2"	70	34	135	178	65	91	54	6.4	W13

Stainless Steel Filter Elements

Stainless steel filter elements are made up to several layers of 316 mesh that are sintered together to form an integrated porous element. The middle mesh is of very fine gauge and determines the filtration rates. This layer is then overlaid with inner and protection. Those filter elements are a typical surface filter and the contaminants are retained on the surface of the filtration layer, which makes cleaning and back flushing very easy. Those filter elements should be ultrasonically cleaned for best results.

Warning

Do not use these products where pressures and temperatures can exceed those listed under »Technical features/data«. Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult IMI Precision Engineering, Thompson Valves Ltd.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes. The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure. System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided. System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.

Authorised Distributor:



46, Jalan SS 22/21, Damansara Jaya,  
47400 Petaling Jaya, Selangor Darul Ehsan, Malaysia.

Email: [nog@nog.com.my](mailto:nog@nog.com.my)

Web access: <http://www.nog.com.my>